

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 7,456,945 B2
APPLICATION NO. : 10/693795
DATED : November 25, 2008
INVENTOR(S) : Shih et al.

Page 1 of 3

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Title Page

Item 75, Inventors, change "Rowland Hieghts" to --Rowland Heights--

Drawings

Sheet 4, replace FIG. 5 with the figure depicted below, wherein reference 390, which is never mentioned, is removed

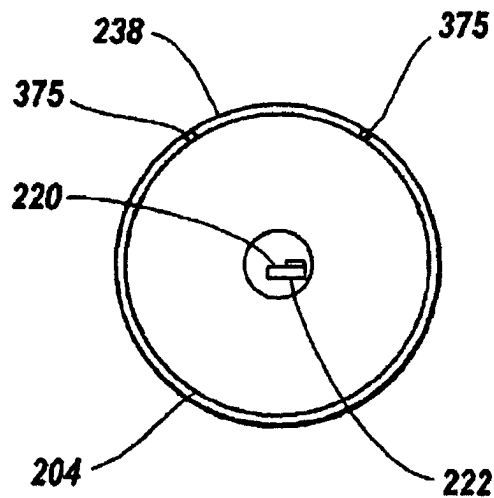


Fig. 5

Signed and Sealed this
Twenty-eighth Day of December, 2010

David J. Kappos

David J. Kappos
Director of the United States Patent and Trademark Office

U.S. Pat. No. 7,456,945 B2

Column 1

Line 33, add --102-- after “The header”

Line 57, add --112-- after “the cap”

Line 63, add --112-- after “the cap”

Line 66, add --112-- after “the cap”

Column 2

Line 12, change “lens accomplishes the alignment” to --lens helps to accomplish the alignment--

Line 49, add --,-- after “thereof”

Column 3

Line 29, change “Header 200” to --Header 204--

Line 30, add --,-- after “components”

Line 31, add --,-- after “package”

Column 4

Line 5, change “Disposable” to --Disposed--

Line 6, add --,-- after “230”

Line 8, remove [end] after “window”

Line 9, change “such as by a” to --such as a--

Line 10, remove [a] before “glass”

Line 16, change “210” to --212--

Line 20, change “210” to --212--

Line 32, change “accord” to --accordance--

Line 41, change “photo diode” to --photodiode--

Line 47, add --,-- after “glasses”

Line 54, add --(FIG. 2A)-- after “204”

Line 60, change “(See” to --(see--

Line 62, add --(FIG. 2A)-- after “210”

Line 67, change “gear” to --gears--

Column 5

Line 8, add --may-- after “mechanisms”

Line 11, add --may-- before “lock”

Line 15, add --,-- after “302”

Line 15, add --,-- after “202”

Line 48, change “204” to --202--

Line 51, change “204” to --202--

Line 51, change “Various devices can” to --Various other devices can also--

CERTIFICATE OF CORRECTION (continued)

Page 3 of 3

U.S. Pat. No. 7,456,945 B2

Column 6

Line 20, add --260-- after “pattern”

Line 21, add --,-- after “202”

Line 22, change “system 370,” to --system 370--

Line 31, change “that” to --and--

Line 35, add --370-- after “system”

Line 49, change “volts, a current of 0.5 amps,” to --volts and a current of 0.5 amps--

Line 52, change “used,” to --used--

Line 59, change “welding step in” to --welding step, in--

Column 7

Line 13, change “includes,” to --includes--

Line 24, change “header” to --header,--

Line 25, change “align” to --align,--

Line 50, change “cap,” to --cap through use of the screw 332 (FIG. 4),--

Lines 51 and 52, remove [Clamping the arm to the cap through use of the screw (FIG. 4) accomplishes this.]